

EVIDENCE LOCKERS

Built to meet the rigorous demands of our public safety professionals. Our Sentinel® line of evidence lockers takes security to the highest level.

CHAIN OF CUSTODY IS CRITICAL IN THE HANDLING OF EVIDENCE. WE'VE DESIGNED A SYSTEM TO MEET YOUR DEPARTMENT'S NEEDS WITH SECURITY AND FUNCTIONALITY IN MIND

HEAVY DUTY CONSTRUCTION USING 16 GAUGE STEEL

36 STANDARD CONFIGURATIONS INCLUDING 18, 24, AND 36" WIDE UNITS

STAND ALONE AND INTEGRAL REFRIGERATION OPTIONS AVAILABLE

AVAILABLE IN BOTH PASS-THRU AND NON PASS-THRU MODELS


VARIETY OF LOCK OPTIONS AVAILABLE FOR BOTH KEYED AND KEYLESS REQUIREMENTS



*Manufacturing Quality
Metal Products
Since 1903*



EVIDENCE LOCKER DOOR CONFIGURATIONS




1801AA



1802AA




1802AB




1808AA




2404AB




2406AA

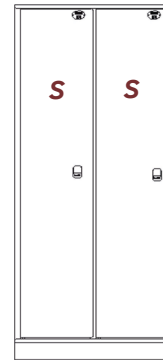

02AA

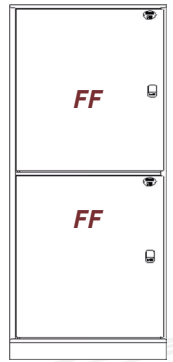


02AB



03AA




04AA




04AB




04AC




05AA




05AB



05AC




05AD



06AA




06AC




06AD




07AA




07AB




08AA




08AB




08AC




08AD




08AE



09AA




10AA





10AB

Sample module configurations shown are 18"W, 24"W and 36"W.
All lockers are 24"D x 82"H including a 4" attached base.

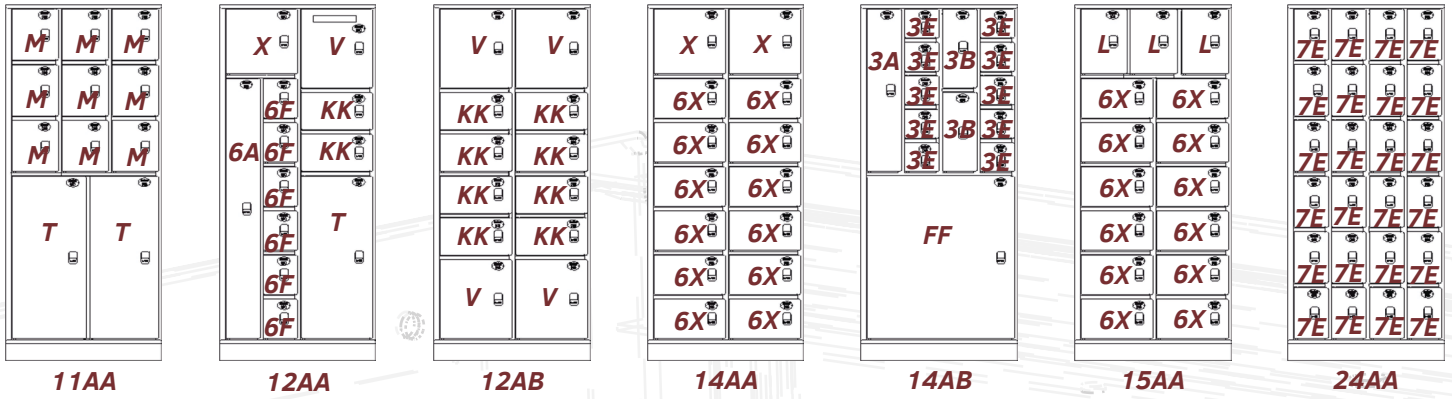

REFRIGERATED EVIDENCE LOCKER DOOR CONFIGURATIONS

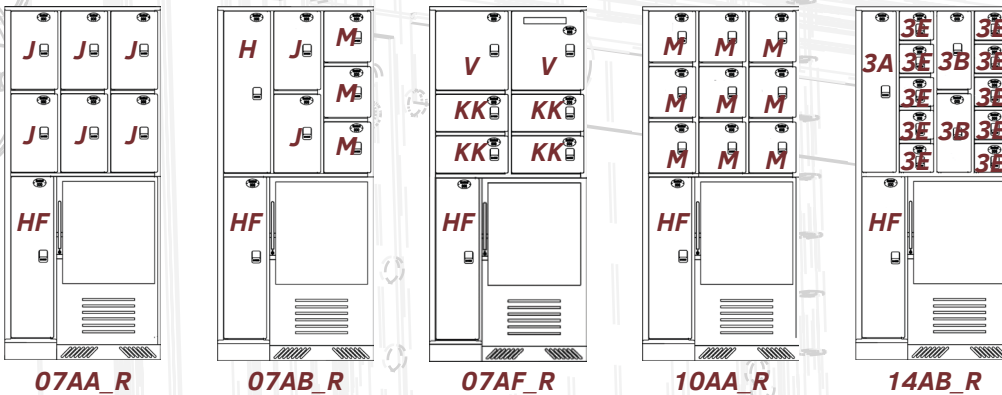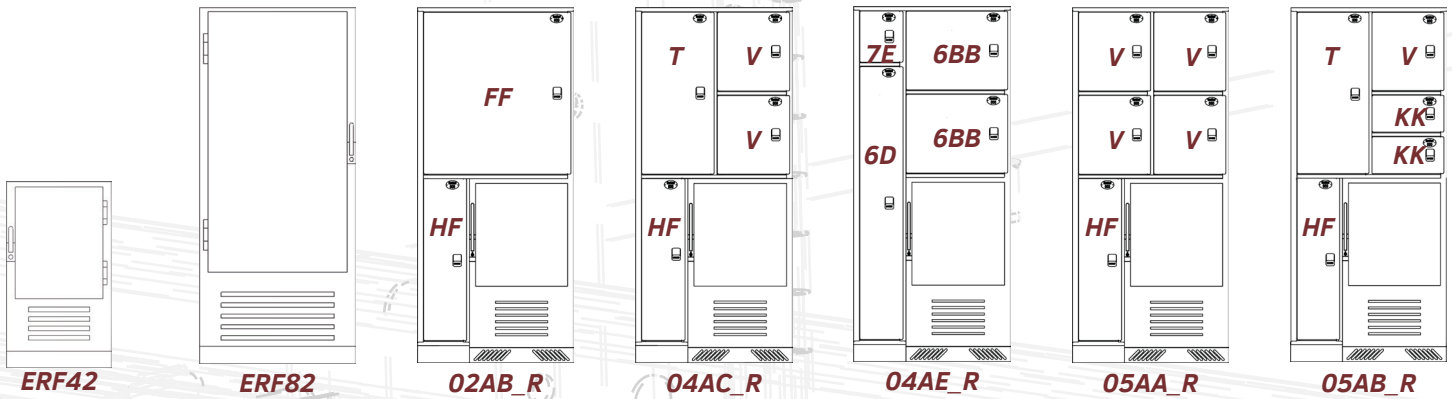

| UNIT DIMENSIONS | | |
|-----------------|-----------------------------------|-----------------------------------|
| | DOOR WIDTH | HEIGHT |
| B | 10 ³ / ₁₆ " | 9 ³ / ₈ " |
| FF | 33 ¹ / ₈ " | 37 ³ / ₈ " |
| H | 10 ³ / ₁₆ " | 37 ³ / ₈ " |
| HF | 9 ³ / ₁₆ " | 37 ³ / ₈ " |
| HH | 21 ⁵ / ₈ " | 37 ³ / ₈ " |
| J | 10 ³ / ₁₆ " | 18 ³ / ₁₆ " |
| KK | 15 ⁷ / ₈ " | 8 ¹ / ₁₆ " |
| L | 10 ³ / ₁₆ " | 15" |
| M | 10 ³ / ₁₆ " | 11 ³ / ₄ " |
| S | 15 ⁷ / ₈ " | 75 ⁷ / ₈ " |
| T | 15 ⁷ / ₈ " | 37 ³ / ₈ " |
| V | 15 ⁷ / ₈ " | 18 ³ / ₁₆ " |
| X | 15 ⁷ / ₈ " | 15" |
| 3A | 7 ³ / ₁₆ " | 37 ³ / ₈ " |
| 3B | 7 ³ / ₁₆ " | 18 ³ / ₁₆ " |
| 3E | 7 ³ / ₁₆ " | 6 ⁵ / ₈ " |
| 3J | 10 ³ / ₁₆ " | 56 ⁵ / ₈ " |
| 3V | 15 ⁷ / ₈ " | 56 ⁵ / ₈ " |
| 6A | 7 ³ / ₁₆ " | 59 ⁷ / ₈ " |
| 6BB | 21 ⁵ / ₈ " | 18 ³ / ₁₆ " |
| 6D | 7 ³ / ₁₆ " | 63 ³ / ₈ " |
| 6F | 7 ³ / ₁₆ " | 9 ¹ / ₈ " |
| 6G | 10 ³ / ₁₆ " | 59 ⁷ / ₈ " |
| 6S | 15 ⁷ / ₈ " | 59 ⁷ / ₈ " |
| 6X | 15 ⁷ / ₈ " | 9 ¹ / ₈ " |
| 7E | 7 ³ / ₁₆ " | 11 ³ / ₄ " |

LOCK OPTIONS

NON PASS-THRU

Free standing lockers: evidence is both deposited and retrieved from the same self-closing doors.



PASS-THRU

Lockers are built into a wall: evidence can be deposited through one side and retrieved through another.




REFRIGERATED EVIDENCE LOCKER INSERT CONFIGURATIONS



12 DOOR INSERT



15 DOOR INSERT

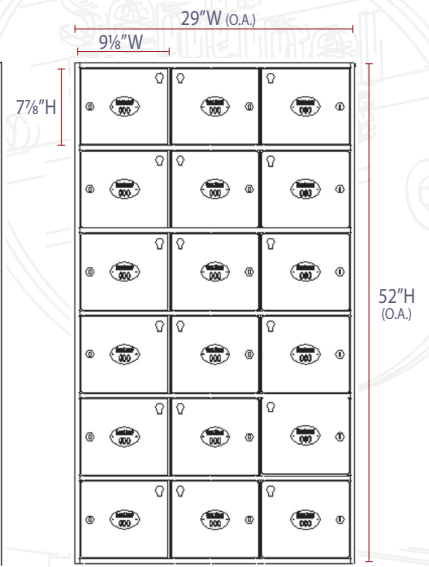

18 DOOR INSERT


**EXTERIOR VIEW -
82" HIGH MODEL**

Overall size: 36"Wx24"Dx82"H
Power requirements: 115VAC, 60Hz,
dedicated 15 amp circuit
(Choose from multiple door insert options)




INTERIOR VIEW - 42 1/2" HIGH MODEL


Overall size: 24"Wx24"Dx42 1/2"H
Power requirements: 115VAC, 60Hz,
dedicated 15 amp circuit
(Shown with 6 door regular insert)

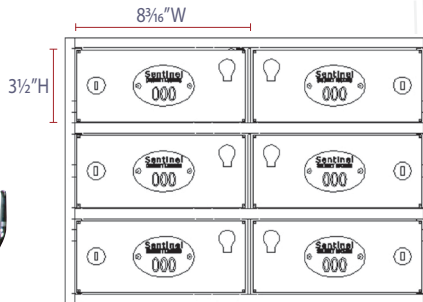


6 DOOR REGULAR INSERT

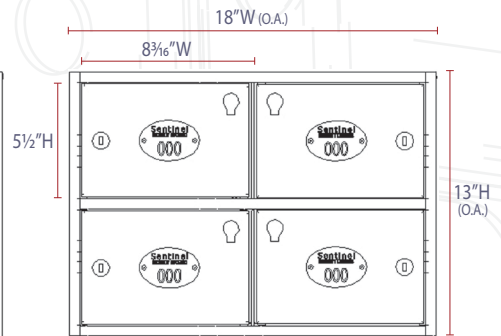

4 DOOR REGULAR INSERT

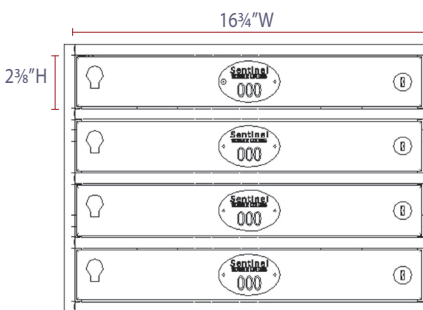

4 DOOR HORIZONTAL INSERT

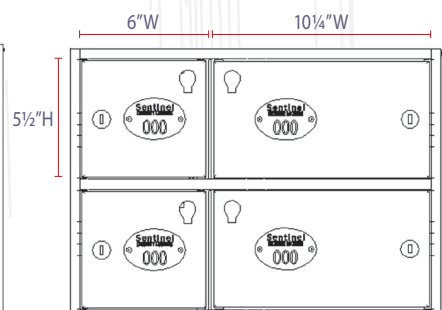

4 DOOR IRREGULAR INSERT



TIFFIN METAL PRODUCTS COMPANY™

450 Wall Street · Tiffin, Ohio 44883
800-537-0983 · www.tiffinmetal.com

